


GENUS 800



ACCIAIO

spessore (mm)	peso (Kg/m ²)	Jxx (cm ⁴ /m)	Wxx (cm ³ /m)
0,50	4,91	7,58	3,02
0,60	5,89	9,20	3,67
0,80	7,85	12,37	4,94
1,00	9,81	15,46	6,18

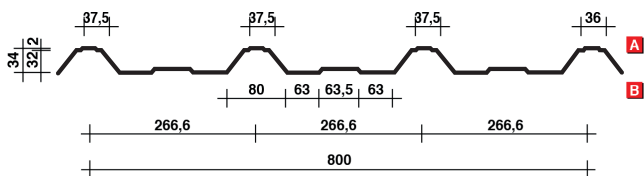


spessore (mm)	interasse cm								
0,50	60	80	100	120	150	200	225	275	300
0,50	1050	591	378	262	164	69	-	-	-
0,60	1276	718	459	319	199	84	59	-	-
0,80	1719	967	619	430	267	113	79	-	-
1,00	2153	1211	775	538	334	141	99	54	-



spessore (mm)	interasse cm								
0,50	60	80	100	120	150	200	225	275	300
0,50	1376	774	495	344	220	124	98	66	51
0,60	1673	941	602	418	268	151	119	80	62
0,80	2254	1268	811	564	361	203	160	107	84
1,00	2822	1588	1016	706	452	254	201	134	104

ALLUMINIO

spessore (mm)	peso (Kg/m ²)	Jxx (cm ⁴ /m)	Wxx (cm ³ /m)
0,60	2,02	9,20	3,67
0,70	2,36	10,64	4,24
0,80	2,70	12,21	4,88
1,00	3,37	15,46	6,18




spessore (mm)	interasse cm					
0,60	60	80	100	120	150	200
0,60	314	176	113	78	50	-
0,70	363	204	131	91	58	-
0,80	417	235	150	104	67	-
1,00	529	298	191	132	85	-




spessore (mm)	interasse cm					
0,60	60	80	100	120	150	200
0,60	441	231	148	103	66	-
0,70	363	204	131	91	58	-
0,80	547	308	197	137	88	-
1,00	694	390	250	173	111	62

Nota: freccia max = $f \leq l/150$.
1Kg/m² 10 N/m²

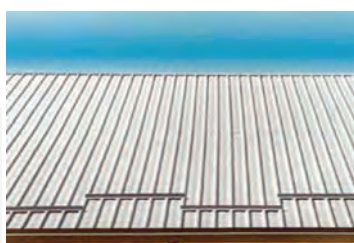


GENUS 30

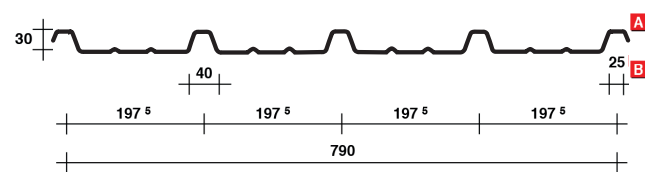

ACCIAIO

spessore (mm)	peso (Kg/m ²)	Jxx (cm ⁴ /m)	Wxx (cm ³ /m)
0,50	4,97	6,50	2,82
0,60	5,96	7,88	3,42
0,80	7,95	10,58	4,60
1,00	9,94	13,20	5,75



spessore (mm)	interasse cm								
0,50*	60	80	100	120	150	200	225	275	300
0,50*	980	552	353	245	140	59	-	-	-
0,60	1190	670	428	298	170	72	50	-	-
0,80	1601	901	576	400	229	97	68	-	-
1,00	2002	1126	721	500	285	120	85	-	-




spessore (mm)	interasse cm								
0,50*	60	80	100	120	150	200	225	275	300
0,50*	1285	723	463	321	206	116	91	57	-
0,60	1560	878	562	390	250	140	111	69	53
0,80	2099	1181	756	525	336	189	149	93	71
1,00	2624	1476	945	656	420	236	187	116	89

* La norma CNR 10022/85 sconsiglia l'uso di questo spessore per le coperture.

ALLUMINIO

spessore (mm)	peso (Kg/m ²)	Jxx (cm ⁴ /m)	Wxx (cm ³ /m)
0,60	2,05	7,88	3,95
0,70	2,39	9,11	3,95
0,80	2,73	10,45	4,54
1,00	3,42	13,20	5,75



spessore (mm)	interasse cm					
0,60	60	80	100	120	150	200
0,60	293	165	105	73	-	-
0,70	338	190	122	85	54	-
0,80	389	219	140	97	62	-
1,00	492	277	177	123	79	-



spessore (mm)	interasse cm					
0,60	60	80	100	120	150	200
0,60	384	216	138	96	61	-
0,70	444	250	160	111	71	-
0,80	510	287	183	127	82	-
1,00	645	363	232	161	103	58

Nota: freccia max = $f \leq l/150$.
1Kg/m² 10 N/m²

