




GENUS 160 POSITIVO

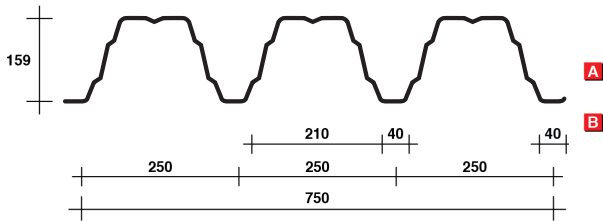

spessore (mm)	peso (Kg/m ²)	Jxx (cm ⁴ /m)	Winf (cm ³ /m)	Wsup (cm ³ /m)
0,75	12,00	414,04	48,94	54,37
0,88	14,00	515,91	58,81	74,52
1,00	16,00	606,49	67,79	84,78
1,25	20,00	790,32	86,36	113,32
1,50	23,00	978,17	105,03	143,04



spessore	interasse m										
	SP	4,00	4,50	5,00	5,50	6,00	6,50	7,00	7,50	8,00	Freccia
0,75	415	368	272	200	151	116	90	71	56		F 1/200
	364	250	177	130	97	73	56	-	-		F 1/300
0,88	562	475	340	250	189	145	113	89	71		F 1/200
	454	454	312	222	162	121	92	71	55		F 1/300
1,00	711	556	400	295	223	171	133	105	84		F 1/200
	534	367	262	191	143	109	84	65	-		F 1/300
1,25	906	708	522	385	291	224	174	138	110		F 1/200
	697	479	342	250	187	143	110	85	67		F 1/300
1,50	1102	862	647	477	361	277	217	171	137		F 1/200
	863	594	424	311	233	177	137	106	83		F 1/300



Carico utile massimo in Kg/m²


spessore	interasse m										
	SP	4,00	4,50	5,00	5,50	6,00	6,50	7,00	7,50	8,00	Freccia
0,75	323	269	228	195	170	149	135	120	102		F 1/200
								102	81	65	
0,88	423	352	298	255	222	194	172	153	137		F 1/200
						190	149	118	94		
1,00	524	436	369	316	274	240	213	189	170		F 1/200
						224	175	139	112		
1,25	759	631	534	458	397	348	307	273	229		F 1/200
					378	292	229	182	146		
1,50	968	801	675	577	499	436	385	342	284		F 1/200
					469	362	284	226	182		

Nota: calcoli effettuati considerando le tolleranze UNI minime sugli spessori


Nota: Freccia con limitazione F 1/200 F 1/300



GENUS 160 NEGATIVO

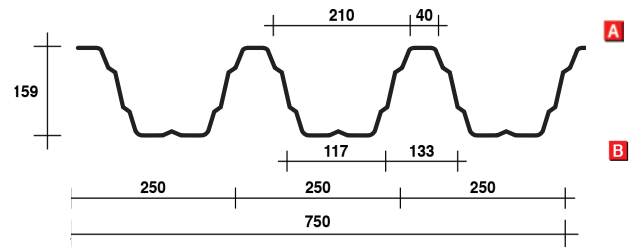

spessore (mm)	peso (Kg/m ²)	Jxx (cm ⁴ /m)	Winf (cm ³ /m)	Wsup (cm ³ /m)
0,75	12,00	392,57	67,18	38,36
0,88	14,00	496,32	81,08	49,79
1,00	16,00	597,97	94,07	61,36
1,25	20,00	822,48	121,34	87,99
1,50	23,00	987,31	145,35	105,49



spessore	interasse m										
	SP	4,00	4,50	5,00	5,50	6,00	6,50	7,00	7,50	8,00	Freccia
0,75	400	312	250	189	142	109	85	66	52		F 1/200
	344	236	168	122	91	69	53	-	-		F 1/300
0,88	520	406	325	240	181	139	108	85	67		F 1/200
	436	299	213	156	116	88	67	52	-		F 1/300
1,00	642	502	394	291	219	168	131	103	82		F 1/200
	526	362	258	189	141	107	82	64	-		F 1/300
1,25	923	722	544	402	303	233	182	144	115		F 1/200
	726	500	356	261	196	149	115	90	70		F 1/300
1,50	1107	865	653	482	364	280	219	173	138		F 1/200
	871	600	428	314	235	179	138	108	84		F 1/300



Carico utile massimo in Kg/m²

spessore	interasse m										
	SP	4,00	4,50	5,00	5,50	6,00	6,50	7,00	7,50	8,00	Freccia
0,75	363	304	259	224	186	172	153	137	112		F 1/200
						143	112	88	71		
0,88	458	383	326	281	236	215	191	170	142		F 1/200
						182	142	113	90		
1,00	550	459	390	335	285	256	226	202	172		F 1/200
						220	173	137	110		
1,25	752	625	528	452	392	343	303	270	239		F 1/200
						305	239	190	153		
1,50	966	799	673	575	498	435	383	341	287		F 1/200
					474	366	287	228	184		

Nota: calcoli effettuati considerando le tolleranze UNI minime sugli spessori

Nota: Freccia con limitazione F 1/200 F 1/300