



GENUS 60

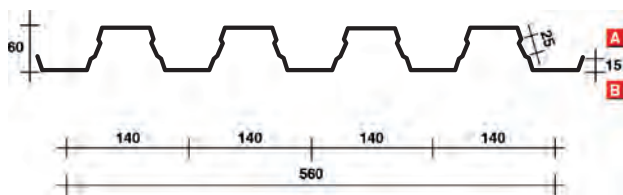

GENUS 60 CASSAFORMA A PERDERE

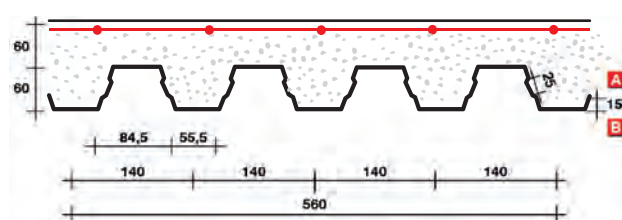


ACCIAIO

spessore (mm)	peso (Kg/m ²)	Jxx (cm ⁴ /m)	Winf (cm ³ /m)	Wsup (cm ³ /m)
0,60	8,41	82,43	20,85	20,61
0,80	11,21	110,93	34,98	27,63
1,00	14,02	138,86	34,98	34,58
1,20	16,82	166,36	41,88	41,40
1,50	21,03	206,64	51,99	51,39


ACCIAIO

Getto CLS 5 cm


spessore (mm)	peso (Kg/m ²)	Jxx (cm ⁴ /m)	Winf (cm ³ /m)	Wsup (cm ³ /m)
0,60	8,41	82,43	20,85	20,61
0,80	11,21	110,93	34,98	27,63
1,00	14,02	138,86	34,98	34,58
1,20	16,82	166,36	41,88	41,40
1,50	21,03	206,64	51,99	51,39



spessore (mm)	interasse cm									Freccia
0,60	1,00	1,50	2,00	2,50	3,00	3,50	4,00	4,50	5,00	F 1/200
	1023	580	378	266	189	115	73	49	-	F 1/400
					89	52	-	-	-	F 1/200
					124	73	45	-	-	F 1/400
0,80	1689	943	608	427	263	161	103	68	47	F 1/200
					124	73	45	-	-	F 1/400
1,00	2484	1371	879	613	342	209	135	90	61	F 1/200
					579	163	97	59	-	F 1/400
1,20	3379	1845	1176	817	424	260	168	112	77	F 1/200
					712	203	120	74	46	F 1/400
1,50	4824	2608	1649	1141	551	338	218	146	100	F 1/200
					915	263	157	97	61	F 1/400




spessore (mm)	interasse m							
0,60	1,50	2,00	2,50	3,00	3,50	4,00	4,50	5,00
	1842	1363	1012	697	436	278	181	-
0,80	1935	1456	1132	795	592	448	265	141
1,00	1998	1480	1155	907	659	511	282	163
1,20	2035	1515	1187	936	730	534	300	174
1,50	2040	1552	1187	936	773	588	327	193



carico utile massimo Kg/m²
(compreso peso proprio)

spessore (mm)	interasse cm									Freccia
0,60	1,00	1,50	2,00	2,50	3,00	3,50	4,00	4,50	5,00	F 1/200
	1472	851	474	301	200	153	120	97	73	F 1/400
		784	324	161	184	112	71	47	-	F 1/200
		1267	708	449	320	245	192	145	102	F 1/400
		1092	452	226	254	155	100	66	45	F 1/200
0,80	2648	1722	963	603	461	351	274	188	133	F 1/200
		1417	588	294	329	201	129	86	58	F 1/400
1,00	3480	2204	1233	748	615	466	338	232	163	F 1/200
		1753	731	364	404	247	159	106	72	F 1/400
1,20	3958	2939	1643	969	856	647	435	298	210	F 1/200
		2276	946	472	519	318	205	137	93	F 1/400



carico utile massimo Kg/m²
(compreso peso proprio)

spessore (mm)	interasse m							
0,60	1,50	2,00	2,50	3,00	3,50	4,00	4,50	5,00
	1920	1401	1051	779	571	422	187	-
0,80	1966	1472	1147	812	609	462	281	157
1,00	2011	1500	1172	921	681	530	300	179
1,20	2054	1532	1200	957	762	548	318	192
1,50	2060	1570	1200	957	800	602	342	202

Nota:
calcoli effettuati considerando le tolleranze UNI minime sugli spessori

Nota:
calcoli effettuati considerando le tolleranze UNI minime sugli spessori

Nota:
Freccia con limitazione F 1/200 F 1/400

