



UNI ROOF 28

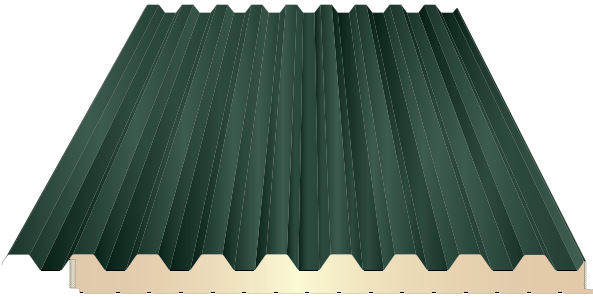

Versione disponibile con finiture inferiori:

- Acciaio
- Alluminio

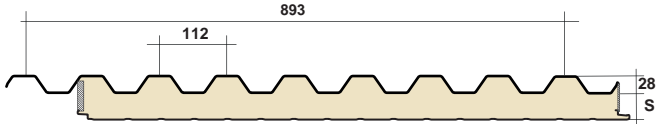

ACCIAIO

lato superiore
acier 0,5 mm

lato inferiore
acciaio 0,4 mm

Distanza tra gli appoggi									U
SP	peso	1,50	2,00	2,50	3,00	3,50	4,00	4,50	trasmittanza W/m²K
40	10,27	376	252	182	134	102	78	60	0,50
80	11,05	633	445	333	258	207	164	135	0,27
120	11,83	770	570	442	350	287	221	179	0,19

ALLUMINIO

lato superiore
alluminio 0,7 mm

lato inferiore
acciaio 0,4 mm

Distanza tra gli appoggi									U
SP	peso	1,50	2,00	2,50	3,00	3,50	4,00	4,50	trasmittanza W/m²K
40	7,10	431	282	200	146	109	85	65	0,50
80	8,46	674	471	352	273	216	175	142	0,27
120	9,82	839	575	456	355	303	233	185	0,19

UNI Roof 28 Mono

Versione disponibile con finiture inferiori:

- Cartongfello
- Alluminio centesimale




UNI Roof 28 Farm

Versione disponibile con finiture inferiori:

- Vetoresina



UNI COPPO

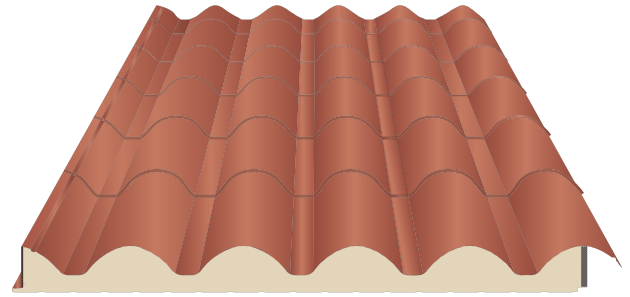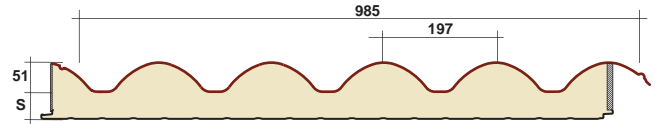

Versione disponibile con finiture inferiori:

- Acciaio
- Alluminio

ACCIAIO

lato superiore
acciaio 0,5 mm

lato inferiore
acciaio 0,4 mm

Distanza tra gli appoggi						U
SP	peso	1,50	2,00	2,50	3,00	trasmittanza W/m²K
30	10,25	342	254	197	103	0,49
40	10,62	404	300	234	145	0,41
50	10,39	466	347	273	174	0,34
60	11,37	528	393	312	204	0,30
80	12,12	651	486	386	268	0,24
100	12,87	775	578	460	336	0,20

UNI Coppo Mono

Versione disponibile con finiture inferiori:


- Cartongfello
- Alluminio centesimale

UNI Coppo Farm


Versione disponibile con finiture inferiori:

- Vetoresina


COLORI DISPONIBILI LATO SUPERIORE:




1 Rosso coppo



2 Rosso coppo anticato



3 Giallo Siracusa



4 Testa di moro