


# GENUS 160 POSITIVO



spessore (mm)	peso (Kg/m <sup>2</sup> )	Jxx (cm <sup>4</sup> /m)	Winf (cm <sup>2</sup> /m)	Wsup (cm)
0,75	12,00	414,04	48,94	54,37
0,88	14,00	515,91	58,81	74,52
1,00	16,00	606,49	67,79	84,78
1,25	20,00	790,32	86,36	113,32
1,50	23,00	978,17	105,03	143,04

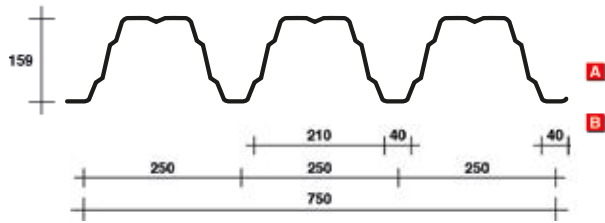

spessore	interasse m									Freccia
	SP	4,00	4,50	5,00	5,50	6,00	6,50	7,00	7,50	
0,75	415	368	272	200	151	116	90	71	56	F 1/200
	364	250	177	130	97	73	56	-	-	F 1/300
0,88	562	475	340	250	189	145	113	89	71	F 1/200
	454	454	312	222	162	121	92	71	55	F 1/300
1,00	711	556	400	295	223	171	133	105	84	F 1/200
	534	367	262	191	143	109	84	65	-	F 1/300
1,25	906	708	522	385	291	224	174	138	110	F 1/200
	697	479	342	250	187	143	110	85	67	F 1/300
1,50	1102	862	647	477	361	277	217	171	137	F 1/200
	863	594	424	311	233	177	137	106	83	F 1/300



Carico utile massimo in Kg/m<sup>2</sup>

spessore	interasse m									Freccia
	SP	4,00	4,50	5,00	5,50	6,00	6,50	7,00	7,50	
0,75	323	269	228	195	170	149	135	120	102	F 1/200
								102	81	65
0,88	423	352	298	255	222	194	172	153	137	F 1/200
						190	149	118	94	
1,00	524	436	369	316	274	240	213	189	170	F 1/200
						224	175	139	112	
1,25	759	631	534	458	397	348	307	273	229	F 1/200
					378	292	229	182	146	
1,50	968	801	675	577	499	436	385	342	284	F 1/200
					469	362	284	226	182	

Nota:  
calcoli effettuati considerando le tolleranze UNI minime sugli spessori

Nota:  
Freccia con limitazione  
F 1/200  
F 1/300

