


GENUS 45




acciaio

spessore (mm)	peso (Kg/m ²)	Jxx (cm ⁴ /m)	Wxx (cm ³ /m)
0,50	5,16	17,76	6,63
0,60	6,20	21,53	8,04
0,80	8,27	29,08	10,86
1,00	10,34	36,40	13,56

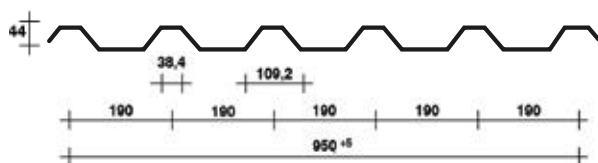

spessore (mm)	interasse cm								
	60	80	100	120	150	200	225	275	300
0,50	2307	1297	830	577	369	162	114	62	-
0,60	2798	1574	1007	700	448	196	138	76	58
0,80	3780	2126	1361	945	605	265	186	102	79
1,00	4722	2656	1700	1180	755	332	233	128	98



carico utile massimo Kg/m²
(compreso peso proprio)

spessore (mm)	interasse cm								
	60	80	100	120	150	200	225	275	300
0,50	3024	1701	1089	756	484	272	215	144	120
0,60	3668	2063	1321	917	587	330	261	175	145
0,80	4956	2788	1784	1239	793	446	352	236	196
1,00	6190	3482	2228	1548	990	557	440	295	246

Nota: freccia
max = $f \leq l/150$.



Nota: freccia
max = $f \leq l/150$.