


GENUS 46



acciaio


spessore (mm)	peso (Kg/m ²)	Jxx (cm ⁴ /m)	Wxx (cm ³ /m)
0,60	5,89	14,40	3,73
0,80	7,85	17,20	4,40
1,00	9,81	19,80	5,10

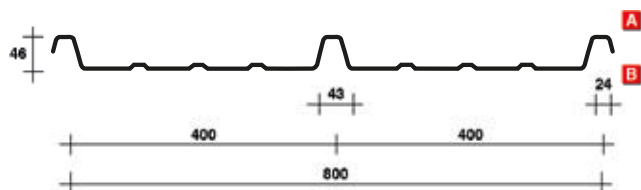

spessore

interasse cm

(mm)	100	125	150	175	200	225	250	275	300
0,60	417	267	185	136	104	82	66	55	46
0,80	492	315	219	160	123	97	78	65	54
1,00	571	365	253	186	142	112	91	75	63

carico utile massimo Kg/m²
(compreso peso proprio)

spessore

interasse cm

(mm)	100	125	150	175	200	225	250	275	300
0,60	522	334	232	170	130	103	83	69	58
0,80	616	394	273	201	154	121	98	81	68
1,00	714	456	317	233	178	141	114	94	79

Nota: freccia
max = $f \leq l/150$.