



GENUS 800

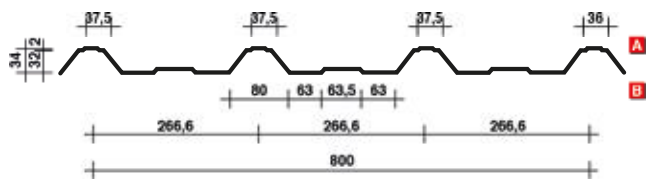

Nota: freccia
max = $f \leq l/150$.



esempio di sormonto




acciaio

spessore (mm)	peso (Kg/m ²)	Jxx (cm ⁴ /m)	Wxx (cm ³ /m)
0,50	4,91	7,58	3,02
0,60	5,89	9,20	3,67
0,80	7,85	12,37	4,94
1,00	9,81	15,46	6,18



spessore (mm)	interasse cm								
	60	80	100	120	150	200	225	275	300
0,50	1050	591	378	262	164	69	-	-	-
0,60	1276	718	459	319	199	84	59	-	-
0,80	1719	967	619	430	267	113	79	-	-
1,00	2153	1211	775	538	334	141	99	54	-



carico utile massimo Kg/m²
(compreso peso proprio)


spessore (mm)	interasse cm								
	60	80	100	120	150	200	225	275	300
0,50	1376	774	495	344	220	124	98	66	51
0,60	1673	941	602	418	268	151	119	80	62
0,80	2254	1268	811	564	361	203	160	107	84
1,00	2822	1588	1016	706	452	254	201	134	104

alluminio

spessore (mm)	peso (Kg/m ²)	Jxx (cm ⁴ /m)	Wxx (cm ³ /m)
0,60	2,02	9,20	3,67
0,70	2,36	10,64	4,24
0,80	2,70	12,21	4,88
1,00	3,37	15,46	6,18



spessore (mm)	interasse cm					
	60	80	100	120	150	200
0,60	314	176	113	78	50	-
0,70	363	204	131	91	58	-
0,80	417	235	150	104	67	-
1,00	529	298	191	132	85	-



carico utile massimo Kg/m²
(compreso peso proprio)

spessore (mm)	interasse cm					
	60	80	100	120	150	200
0,60	441	231	148	103	66	-
0,70	363	204	131	91	58	-
0,80	547	308	197	137	88	-
1,00	694	390	250	173	111	62