


GENUS 950




acciaio

spessore (mm)	peso (Kg/m ²)	Jxx (cm ⁴ /m)	Wxx (cm ³ /m)
0,50	4,96	8,95	4,02
0,60	5,95	10,94	4,91
0,80	7,94	14,94	6,68
1,00	9,92	18,94	8,43

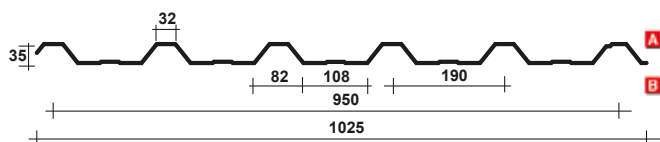

spessore (mm)	interasse cm								
	60	80	100	120	150	200	225	275	300
0,50	1401	788	504	350	194	82	57	-	-
0,60	1709	961	615	427	237	100	70	-	-
0,80	2324	1307	837	581	323	136	96	52	-
1,00	2935	1651	1057	734	409	173	121	66	51




spessore (mm)	interasse cm								
	60	80	100	120	150	200	225	275	300
0,50	1836	1033	661	459	294	165	131	79	60
0,60	2241	1260	807	560	358	202	159	96	74
0,80	3047	1714	1097	762	487	274	217	131	101
1,00	3848	2165	1385	962	616	346	274	166	128

alluminio

spessore (mm)	peso (Kg/m ²)	Jxx (cm ⁴ /m)	Wxx (cm ³ /m)
0,60	2,05	10,94	4,91
0,70	2,39	12,74	5,71
0,80	2,73	14,74	6,59
1,00	3,41	18,94	8,43



spessore (mm)	interasse cm						
	60	80	100	120	150	200	225
0,60	420	236	151	105	67	-	-
0,70	488	275	176	122	78	-	-
0,80	564	317	203	141	90	-	-
1,00	722	406	260	180	115	64	-



spessore (mm)	interasse cm						
	60	80	100	120	150	200	225
0,60	551	310	198	138	88	-	-
0,70	640	360	231	160	102	58	-
0,80	739	416	266	185	118	67	53
1,00	946	532	341	237	151	85	67

Nota: freccia
max = $f \leq l/150$.