


GENUS ONDA 18



acciaio

| spessore (mm) | peso (Kg/m ²) | Jxx (cm ⁴ /m) | Wxx (cm ³ /m) |
|---------------|---------------------------|--------------------------|--------------------------|
| 0,60 | 5,64 | 2,54 | 2,83 |
| 0,80 | 6,84 | 3,41 | 3,79 |
| 1,00 | 9,40 | 4,26 | 4,73 |

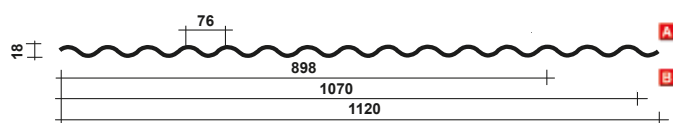

spessore

interasse cm

| (mm) | 60 | 80 | 100 | 120 | 150 | 200 | 225 |
|------|------|-----|-----|-----|-----|-----|-----|
| 0,60 | 860 | 363 | 186 | 107 | 55 | - | - |
| 0,80 | 1153 | 487 | 249 | 144 | 74 | - | - |
| 1,00 | 1437 | 606 | 310 | 180 | 92 | - | - |

carico utile massimo Kg/m²
(compreso peso proprio)

spessore

interasse cm

| (mm) | 60 | 80 | 100 | 120 | 150 | 200 | 225 |
|------|------|------|-----|-----|-----|-----|-----|
| 0,60 | 2149 | 907 | 464 | 269 | 138 | 58 | - |
| 0,80 | 2883 | 1216 | 623 | 360 | 185 | 78 | 55 |
| 1,00 | 3593 | 1516 | 776 | 449 | 230 | 97 | 68 |

alluminio


| spessore (mm) | peso (Kg/m ²) | Jxx (cm ⁴ /m) | Wxx (cm ³ /m) |
|---------------|---------------------------|--------------------------|--------------------------|
| 0,70 | 2,26 | 2,94 | 3,27 |
| 0,80 | 2,58 | 3,37 | 3,75 |
| 1,00 | 3,23 | 4,26 | 4,73 |



spessore

interasse cm

| (mm) | 60 | 80 | 100 | 120 | 150 |
|------|-----|-----|-----|-----|-----|
| 0,70 | 280 | 154 | 79 | - | - |
| 0,80 | 321 | 177 | 91 | 52 | - |
| 1,00 | 405 | 223 | 114 | 66 | - |

carico utile massimo Kg/m²
(compreso peso proprio)

spessore

interasse cm

| (mm) | 60 | 80 | 100 | 120 | 150 |
|------|------|-----|-----|-----|-----|
| 0,70 | 915 | 386 | 198 | 114 | 59 |
| 0,80 | 1049 | 442 | 227 | 131 | 67 |
| 1,00 | 1324 | 559 | 286 | 165 | 85 |

Nota: freccia
max = $f \leq l/150$.