


QUESTI PRODOTTI
POSSONO ESSERE
CURVATI

GENUS ONDA 27

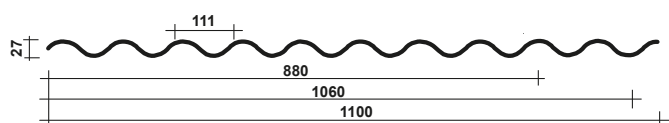


acciaio

spessore (mm)	peso (Kg/m ²)	Jxx (cm ⁴ /m)	Wxx (cm ³ /m)
0,60	6,00	5,76	4,27
0,80	8,00	7,72	5,72
1,00	10,00	9,62	7,13



spessore (mm)	interasse cm								
	60	80	100	120	150	200	225	275	300
0,60	1485	821	420	243	124	53	-	-	-
0,80	1992	1101	564	326	167	70	-	-	-
1,00	2482	1371	702	406	208	88	62	-	-



carico utile massimo Kg/m²
(compreso peso proprio)

spessore (mm)	interasse cm								
	60	80	100	120	150	200	225	275	300
0,60	4862	2051	1050	608	311	131	92	51	-
0,80	6522	2752	1409	815	176	176	124	68	52
1,00	8127	3428	1755	1016	219	219	154	84	65

alluminio

spessore (mm)	peso (Kg/m ²)	Jxx (cm ⁴ /m)	Wxx (cm ³ /m)
0,60	2,41	2,94	3,27
0,80	2,75	3,37	3,75
1,00	3,44	4,26	4,73



spessore (mm)	interasse cm				
	60	80	100	120	150
0,70	280	154	79	-	-
0,80	321	177	91	52	-
1,00	405	223	114	66	-



carico utile massimo Kg/m²
(compreso peso proprio)

spessore (mm)	interasse cm				
	60	80	100	120	150
0,70	915	386	198	114	59
0,80	1049	442	227	131	67
1,00	1324	559	286	165	85

Nota: freccia
max = $f \leq l/150$.

