



UNI 28

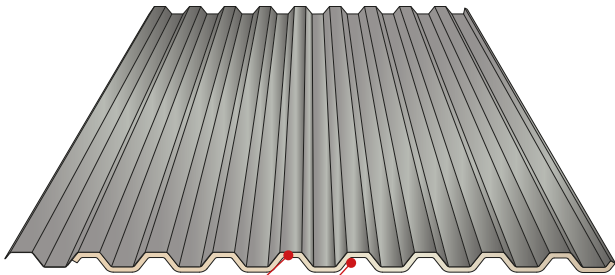

Contattare ufficio tecnico per conformità ai requisiti CAM

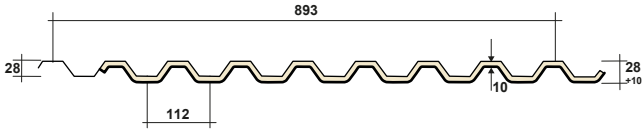


poliuretano espanso ad alta densità  
finitura a nudo o alluminio centesimale



**acciaio**


spessore (mm)	peso (Kg/m <sup>2</sup> )	Jxx (cm <sup>4</sup> /m)	Wxx (cm <sup>3</sup> /m)
0,50	5,98	7,68	3,58
0,60	7,08	9,22	4,84
0,80	9,26	12,30	7,88



spessore (mm)	interasse cm								
	100	125	150	175	200	225	250	275	300
0,50	501	321	223	164	126	99	80	66	56
0,60	678	434	301	221	169	134	108	90	75
0,80	1103	706	490	360	276	218	177	146	123


**alluminio**

spessore (mm)	peso (Kg/m <sup>2</sup> )	Jxx (cm <sup>4</sup> /m)	Wxx (cm <sup>3</sup> /m)
0,60	2,75	9,22	6,83
0,80	3,50	12,30	9,11




spessore (mm)	interasse cm				
	100	120	140	160	180
0,60	452	314	231	177	139
0,80	603	491	308	235	186


CARATTERISTICHE TECNICHE




1 Eliminazione effetto condensa



2 Ottima pedonabilità



3 Sovrapposizione laterale di una greca e mezzo



4 Riduzione del rumore

