


UNI PARETE LANA

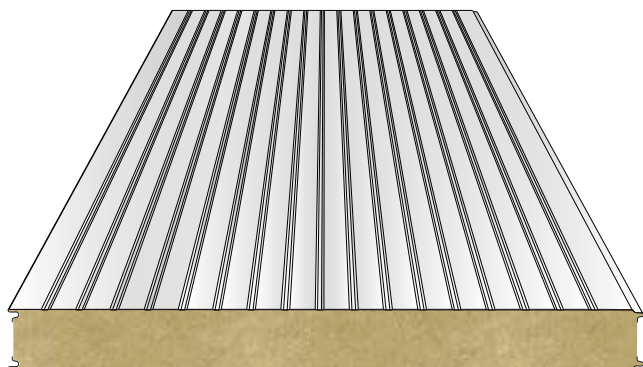


Classe di reazione al fuoco: A2-s1,d0

acciaiolato superiore
acciaio 0,5 mmlato inferiore
acciaio 0,5 mm

SP	peso	Distanza fra gli appoggi								U trasmissione W/m ² K
		1,50	2,00	2,50	3,00	3,50	4,00	4,50		
50	13,32	187	132	112	83	76	-	-	0,72	
60	14,32	202	148	122	98	84	-	-	0,63	
80	16,32	270	191	161	120	108	87	67	0,47	
100	18,32	321	226	191	142	128	104	81	0,38	
120	20,32	380	270	226	167	151	123	93	0,32	
150	23,32	423	297	252	187	167	137	105	0,25	
180	26,32	463	325	276	204	184	150	114	0,21	
200	28,32	503	353	301	222	201	163	124	0,19	

CARATTERISTICHE TECNICHE



Particolare giunzione