



UNI WALL
FISSAGGIO NASCOSTO

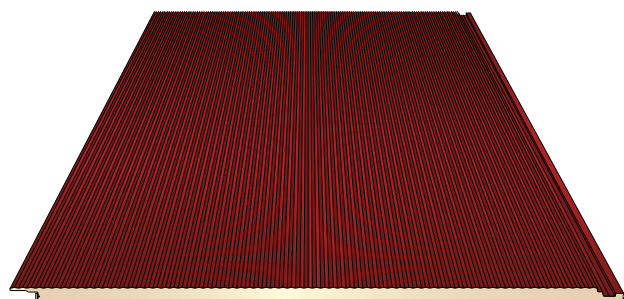

Contattare ufficio tecnico per conformità ai requisiti CAM



acciaio

lato superiore
acciaio 0,4 mm

lato inferiore
acciaio 0,4 mm

Distanza tra gli appoggi	SP	peso	Distanza tra gli appoggi					U trasmissione W/m²K
			2,00	2,50	3,00	3,50	4,00	
30	7,97	75	44	-	-	-	0,76	
40	8,35	121	75	47	-	-	0,58	
50	8,73	164	109	72	48	-	0,47	
60	9,11	207	146	99	68	48	0,40	
80	9,87	292	215	157	113	82	0,30	
100	10,63	379	283	219	162	121	0,24	
120	11,39	462	352	259	188	188	0,21	
140	12,15	553	421	291	211	159	0,18	
150	12,53	584	435	299	217	163	0,17	
180	13,67	583	464	357	259	196	0,13	
200	14,43	583	464	384	287	217	0,12	


alluminio

lato superiore
alluminio 0,6 mm

lato inferiore
alluminio 0,6 mm

Distanza tra gli appoggi	SP	peso	Distanza tra gli appoggi					U trasmissione W/m²K
			2,00	2,50	3,00	3,50	4,00	
30	4,65	49	-	-	-	-	0,76	
40	4,74	82	47	-	-	-	0,58	
50	5,41	121	71	44	-	-	0,47	
60	5,79	163	99	62	41	-	0,40	
80	6,55	254	160	105	71	49	0,30	
100	7,31	344	229	154	107	76	0,24	
120	8,07	428	293	201	146	105	0,21	
140	8,83	514	327	225	163	123	0,18	
150	8,92	530	336	231	167	126	0,17	
180	10,06	556	399	274	199	150	0,13	
200	11,10	586	438	301	219	165	0,12	


FINITURA DISPONIBILE
LATO SUPERIORE:



1 Diamantato

CARATTERISTICHE TECNICHE

* vedi nota pag.6



Particolare - Fissaggio nascosto UniWall